

elite

iNfeel Woven CATALOGUE





INFEEL WOVEN

WOVEN VINYL FLOORING & WALLCOVERING & AREA RUG & ANTI FATIGUE MAT


Woven vinyl offers the look and feel of natural sisal, wool, jute, seagrass and wood, but made from tough, durable and easy to clean vinyl, is a perfect washable flooring alternative for busy homes, offices, shops, restaurants and hotels. From home interiors to offices and hotels, Woven flooring and rugs offer practical, hard-wearing solutions with plenty of styles.



INFEEL WOVEN · DELUX



INFEEL WOVEN · JACQUARD

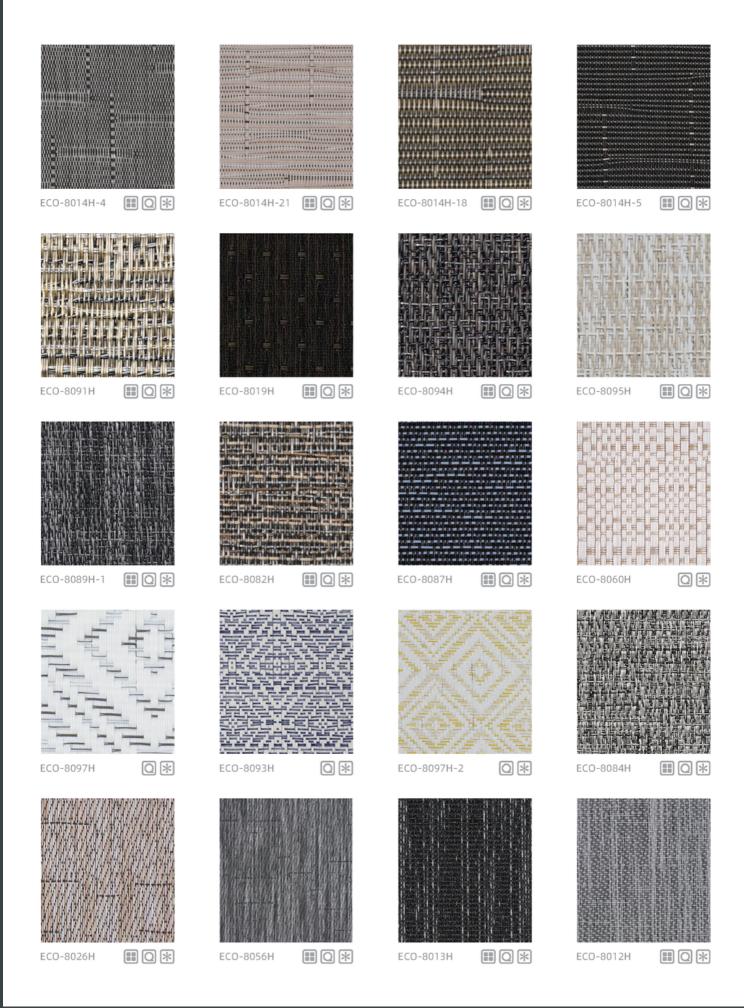

INFEEL WOVEN · CLASSIC



INFEEL WOVEN · ELEGANT



ECO-51005BP



ECO-51008BP-2



ECO-52021BP



ECO-52002BP



ECO-51007BP-2



ECO-51026BP



ECO-51023BP



ECO-52037BP







ECO-51028BP



ECO-52028BP



ECO-52016BP





ECO-51010BP



ECO-52039BP



ECO-52031BP






ECO-51018BP






ECO-52015BP



INFEEL WOVEN · FANTASY

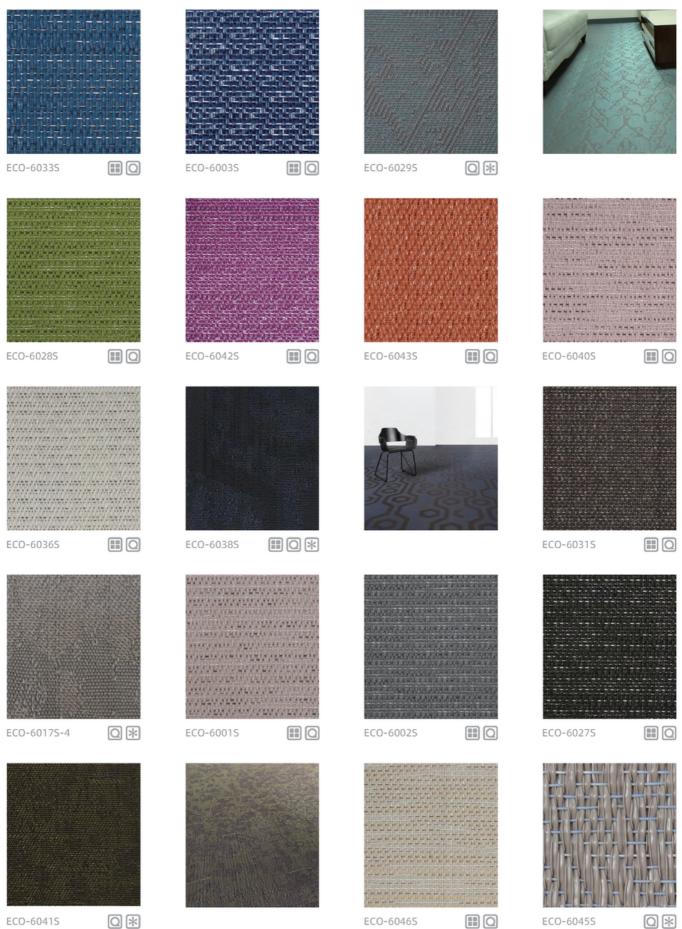

0*

INFEEL WOVEN · SILK ROAD



Note:



0


Woven vinyl tiles


Woven vinyl rolls



Pattern

Woven vinyl flooring is a creative and contemorary flooring concept based on several different tile shapes. Your pattern designs will vary in looking on the choice of colors, the directions of the yarns and the light directions.

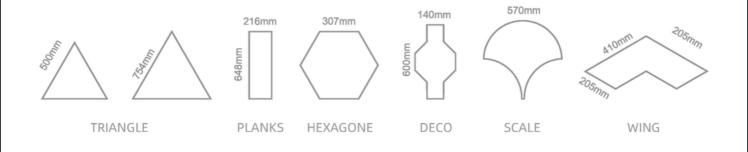

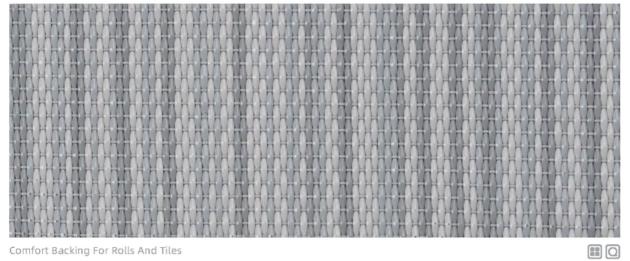


Comfort Backing For Rolls And Tiles

패리패패패패패패패리 비리 비비 프레이프 TT 1 1

PVC Backing For Rolls



PVC Foam Backing For Rugs



Wall Covering With Thin PVC Backing

TECNICHAL INFORMATION

[EC	NICHAL INFORMATION	Standard	Rolls	Tiles	Wall covering	Rugs
3	Weight	ISO 8543	2.7-3.1kg/m ²	3.2-3.8kg/m ²	800-1300g/m ²	1.5-3kgs/m2
-	Thickness	ISO 1765	2.5mm-2.8mm	3.5mm	1mm-1.3mm	1.5-4mm
3	Length	EN 426	20-25m	÷	20-25m	
<u>-</u>	Width	EN 426	2m	÷	2m	2m
ج	Tile dimension	EN 994	(4)	50x50cm		8
кл 2 У	Dimension stability	ISO 2551	<0.25%	<0.25%	<0.25%	<0.25%
9	Curvature	EN 434	<2mm	<2mm	<2mm	<2mm
9	Caster chair	EN 985	Continous use	Continous use	12	Continous use
4	Body voltage	150 1815	≤2.0KV	≤2.0KV	≤2.0KV	≤2.0KV
	Thermal resistance	ISO 8302	Suitable for underfloor heating	Suitable for underfloor heating		Suitable for underfloor heating
3	Colour fastness to light	ISO 105-B02	>6	>6	>6	>6
2 DS	Anti-slip property	EN 13893	>0.3	>0.3	(2)	>0.3
-	Impact sound insulation*	EN ISO 10140	11-12dB	11-12dB	11dB	21
Res 1	Reaction to fire	EN 13501-1	Bfi-s1	BfI-s1	BfI-s1	BfI-s1
)	Airbone sound absorption*	EN ISO 354	-	0.05	9	8
CE	CE certification	EN 14041, EN 15114	NO.EC.1282.OA140305.AYD0738			
	Smoke density	ASTM E662	<450	<450	<450	<450
	REACH test	(REACH)1907/2006	NO.2009070025HF-006			
	ISO9001 certification	ISO 9001:2008	NO.04514Q20096R05			
	ISO14001 certification	ISO 14001:2004	NO.04514Q20029R05			
	Formaid ehyde content text	ASTM D6007-14	NO.1911060065HF-004			

WELCOME TO THE REVOLUTION

elite Exclusive distributor EMEA

www.holaelite.com/en/infeel-woven